

LED DOWNLIGHT





LVA/41DL

Luvia Lighting Concepts SMD LED downlight adopts high lumen SMD LED, PMMA diffuser with even light output. V0-fire rated plastic housing with great heat dissipation.

Internal driver design, shares great popularity by the excellent dimming effect.

It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

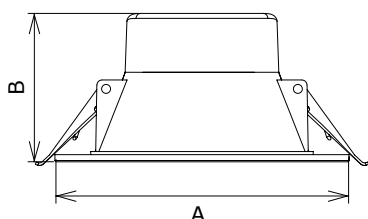

Model	Voltage	Power	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
			3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
LVA/41DL-2.5-7W	AC200-240V	7W	—	—	—	—	550	620	600	595
LVA/41DL-3-8W	AC100-240V AC200-240V	8W	—	—	—	—	720	800	800	760
LVA/41DL-3-10W	AC100-240V AC200-240V	10W	800	870	870	820	800	880	880	830

Model	Dimension(mm)		Product size (mm)	Cut out (mm)	Net weight (kg)	Carton size (mm)	Q'ty/CTN (pcs)
	A	B					
LVA/41DL-2.5-7W	Ø85	55	Ø85x55	Ø70-75	0.2	550x550x160	50
LVA/41DL-3-8W	Ø115	58	Ø115x58	Ø90-95	0.25	390x265x375	30
LVA/41DL-3-10W	Ø115	58	Ø115x58	Ø90-95	0.25	390x265x375	30