

# LED DOWNLIGHT





## LVA/59CL

Luvia Lighting Concepts SMD LED Down light adopts high lumen SMD LED, PMMA diffuser with even light output. White, silver, chrome surface treatment available for different applications.

Triac dimmable, 0-10V dimmable and DALI dimmable version shares great popularity by the excellent dimming effect.

Application: Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, workshop, warehouse, home etc.



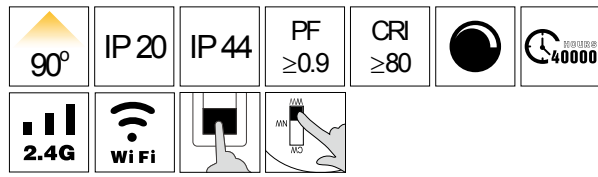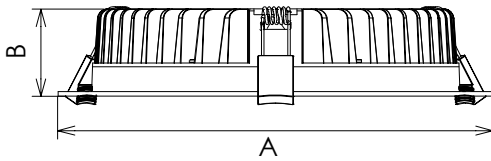

Model	Voltage	Power	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
			3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
LVA/59CL-2-7W	AC100-240V AC200-240V	7W	430	450	460	480	400	420	440	460
LVA/59CL-2.5-10W	AC100-240V AC200-240V	10W	685	700	720	730	640	660	700	710
LVA/59CL-3-10W	AC100-240V AC200-240V	10W	685	700	720	730	640	660	700	710
LVA/59CL-3-13W	AC100-240V AC200-240V	13W	850	880	900	950	800	830	860	900
LVA/59CL-4-13W	AC100-240V AC200-240V	13W	850	880	900	950	800	830	860	900
LVA/59CL-4-18W	AC100-240V AC200-240V	18W	1320	1360	1420	1450	1300	1340	1390	1420
LVA/59CL-5-18W	AC100-240V AC200-240V	18W	1400	1430	1490	1550	1380	1410	1450	1480
LVA/59CL-5-25W	AC100-240V AC200-240V	25W	1850	1900	2000	2100	1800	1850	1920	2000
LVA/59CL-6-18W	AC100-240V AC200-240V	18W	1430	1460	1500	1560	1390	1430	1480	1510
LVA/59CL-6-25W	AC100-240V AC200-240V	25W	1930	1990	2060	2130	1880	1950	2000	2070
LVA/59CL-6-35W	AC100-240V AC200-240V	35W	2600	2680	2760	2830	2570	2630	2710	2760
LVA/59CL-8-18W	AC100-240V AC200-240V	18W	1390	1430	1490	1540	1360	1390	1420	1480
LVA/59CL-8-25W	AC100-240V AC200-240V	25W	1900	1960	2060	2130	1850	1910	2020	2100
LVA/59CL-8-35W	AC100-240V AC200-240V	35W	2590	2640	2700	2790	2560	2410	2680	2750
LVA/59CL-10-45W	AC100-240V AC200-240V	45W	3600	3780	4000	4050	3460	3680	3870	3900

Model	Dimension (mm)		Product size (mm)	Cut out (mm)	Net weight (kg)	Carton size (mm)	Q'ty/CTN (pcs)
	A	B					
LVA/59CL-2	Ø80	39	Ø80x39	Ø60-65	0.28	525x525x200	50
LVA/59CL-2.5	Ø85	39.5	Ø85x39.5	Ø70-75	0.3	575x570x200	50
LVA/59CL-3	Ø110	38	Ø110x38	Ø90-100	0.4	370x485x200	24
LVA/59CL-4	Ø145	45	Ø145x45	Ø120-130	0.59	520x360x510	30
LVA/59CL-5	Ø170	45	Ø170x45	Ø140-150	0.7	590x400x490	30
LVA/59CL-6	Ø190	45	Ø190x45	Ø160-170	0.83	460x460x420	20
LVA/59CL-8	Ø228	45	Ø228x45	Ø200-210	1.1	515x270x405	10
LVA/59CL-10	Ø280	52	Ø280x52	Ø230-260	1.7	620x315x430	10