

LED DOWNLIGHT





LVA/61DL

Aluminum profile provides excellent thermal dissipation. Fire-rated PC diffuser provides even light output.

Waterproof structural design, IP54 protection grade, ideally for damp locations.

Isolated driver solution both in dimmable and non-dimmable version, achieves great dimming compatibility with worldwide brand dimmers.

It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

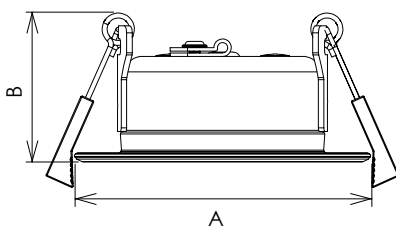

Model	Voltage	Power	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
			3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
LVA/61DI-7W	AC200-240V	7W	460	500	510	500	430	460	470	450
LVA/61DL-10W	AC200-240V	10W	710	760	780	800	700	740	750	780

Model	Dimension(mm)		Product size (mm)	Cut out (mm)	Net weight (kg)	Carton size (mm)	Q'ty/CTN (pcs)
	A	B					
LVA/61DL-7W	Ø85	42.5	Ø85x42.5	Ø70	0.11	525x525x230	50
LVA/61DL-10W	Ø115	42.5	Ø115x42.5	Ø85-95	0.26	520x400x330	36