


LED DOWNLIGHT

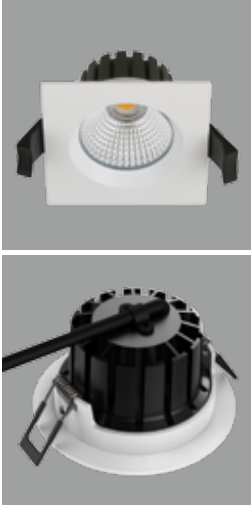



LVA/63DL

Luvia Lighting Concepts Mini downlight is specially designed for all markets with standard cutout size of 68-74mm.

24°/36°/60° beam angle provided, applicable for various lighting effect.

Smart optical design with combination of COB LED and PC reflector, maximally reduces UGR down to 19 or even less.

Waterproof structural design, IP54 protection grade.

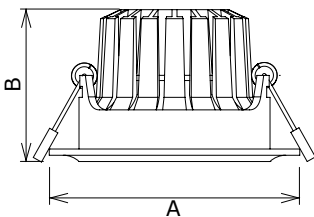

Model	Voltage	Power	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
			2700K	3000K	4000K	5000K	2700K	3000K	4000K	5000K
LVA/63DL-2.5-5W LVA/63DLB-2.5-5W	AC200-240V	5W	420	430	440	450	400	410	420	430
LVA/63DL-2.5-8W	AC200-240V	8W	530	560	570	590	510	520	530	560
LVA/63B-2.5-8W-P LVA/DL63B-2.5-8W-P	AC200-240V	8W	—	—	—	—	400 (2000K~2800K)			

Model	Dimension(mm)		Product size (mm)	Cut out (mm)	Net weight (kg)	Carton size (mm)	Q'ty/CTN (pcs)
	A	B					
LVA/63DL-2.5 LVA/63DL-2.5- LVA/63DLB-2.5	Ø80	55	Ø80x55	Ø68-74	0.28	460x460x295	48
LVA/63DLB-2.5- LVA/63DLB-2.5-	78	55	78x78x50	Ø68-74	0.28	460x460x295	48