




LED DOWNLIGHT

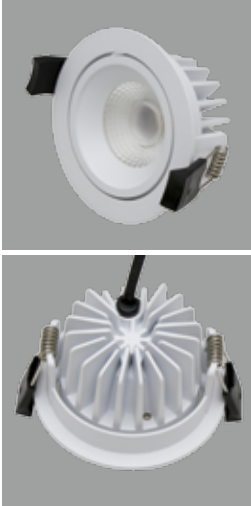

LVA/79CL

CL79 Downlight achieves 100 LPW high efficiency by adopting super high lumen COB and excellent light transmittance prismatic lens. Smart cooling system is specially designed in metal device with vertical fins, allow air flow upward and downward smoothly. It has adjustable head for different lighting directions. External power supply, easy maintenance.

It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

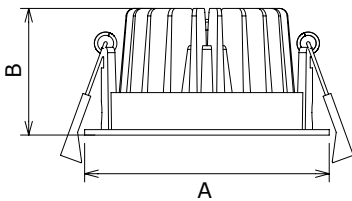

Model	Voltage	Power	Non-DIM Lumen (±5%)				DIM Lumen (±5%)			
			3000K	4000K	5000K	5700K	3000K	4000K	5000K	5700K
LVA/79CL-2.5-10W	AC200-240V	10W	870	890	980	1010	850	860	960	970

Model	Dimension(mm)		Product size (mm)	Cut out (mm)	Net weight (kg)	Carton size (mm)	Q'ty/CTN (pcs)
	A	B					
LVA/79CL-2.5-10W	Ø90	46	Ø90x46	Ø84	0.26	460x460x295	48